


# Time to Check Consumption



## GPM-8213 Digital Power Meter

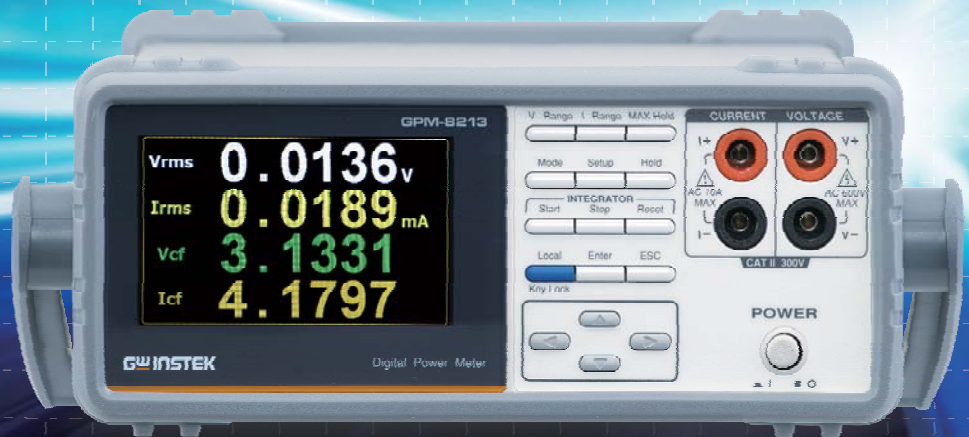

- 4" TFT LCD
- Basic Accuracy : +/- (0.1% of reading + 0.1% of range)
- Two Data Display Modes
  - Standard Display : Displaying Two Major Measurement Items + Six Minor Measurement Items
  - Simple Display : Displaying Test Data of Four Different Measurement Items
- Met the Requirement of IEC 62301 Power Measurement
  - Voltage/Current Test Frequency Bandwidth : DC ~ 6kHz
  - Watt Resolution : 1mW
  - Current Resolution : 0.1 $\mu$ A
  - Current/Voltage Measurements Reach CF=3 for Distorted Wave and CF=6 for Half Range
  - W-h Power vs Time/A-h Current vs Time Integration Function
  - Total Harmonic Distortion Measurement
- Front Panel Test Terminal
- Standard Interfaces : RS-232C, USB Device, LAN
- Optional Test Fixture : GPM-001



## SPECIFICATIONS

MEASUREMENT CHARACTERISTICS		
<b>INPUT</b>		
ITEM RATING VOLTAGE RATING CURRENT IMPEDANCE(50/60Hz)	Voltage Current Current	Range 600 Vrms 20 Arms 2.4 MΩ 5mA~200mA:500 mΩ 0.5A~20A: 5 mΩ 700 Vrms 25 Arms 300 V
MAXIMUM VOLTAGE MAXIMUM CURRENT MAXIMUM COMMON MODE VOLTAGE LOW PASS FILTER	Cutoff frequency	500 Hz
<b>PARAMETERS</b>		
ITEM MEASUREMENT	Voltage Current Power Crest Factor Power Factor Frequency Angle Total Harmonic Distortion Integration	Symbol Vdc, Vrms, V+pk, V-pk Idc, Irms, I+pk, I-pk P, P+pk, P-pk, VA, Var CFV, CFI PF VHz, IHz Deg THDV, THDI  Time, WP, WP+, WP-, q, q+, q-
DISPLAY DIGITS FREQUENCY BANDWIDTH AVERAGE PT RATE CT RATE DISPLAY MODE	Standard Simple	5 digits DC, 45Hz~6kHz 1, 2, 4, 8, 16, 32, 64 1 ~ 9999.999 1 ~ 9999.999 8 measurement Item 4 measurement Item
<b>VOLTAGE</b>		
ITEM RANGE CREST FACTOR ACCURACY	CF=3 CF=6  Effective Range DC 45Hz ≤ f ≤ 66Hz 66Hz < f ≤ 1kHz 1kHz < f ≤ 6kHz Filter(ON)	Range 15V, 30V, 60V, 150V, 300V, 600V 7.5V, 15V, 30V, 75V, 150V, 300V 3 or 6 (selectable) 1% ~ 105% of range ±(0.2% of reading+0.2% of range) ±(0.1% of reading+0.1% of range) ±(0.1% of reading+0.2% of range) ±3% of reading Add 0.3% of reading@45Hz ~ 66Hz Add ±0.03% of reading/°C 0.5% of range
TEMPERATURE EFFECT RESIDUAL NOISE	5-18°C / 28-40°C	Add ±0.03% of reading/°C 0.5% of range
<b>CURRENT</b>		
ITEM MEASUREMENT	CF=3 CF=6	Range 5mA, 10mA, 20mA, 50mA, 100mA, 200mA, 500mA, 1A, 2A, 5A, 10A, 20A 2.5mA, 5mA, 10mA, 25mA, 50mA, 100mA, 250mA, 0.5A, 1A, 2.5A, 5A, 10A 3 or 6 (selectable)
CREST FACTOR ACCURACY	Effective Range DC 45Hz ≤ f ≤ 66Hz 66Hz < f ≤ 1kHz 1kHz < f ≤ 6kHz Filter(ON)	1% ~ 105% of range ±(0.2% of reading+0.2% of range) ±(0.1% of reading+0.1% of range) ±(0.1% of reading+0.2% of range) ±3% of reading Add 0.3% of reading@45Hz ~ 66Hz Add ±0.03% of reading/°C 0.5% of range
TEMPERATURE EFFECT RESIDUAL NOISE	5-18°C/28-40°C	Add ±0.03% of reading/°C 0.5% of range
<b>POWER</b>		
ITEM ACCURACY	Effective Range DC 45Hz ≤ f ≤ 66Hz 66Hz < f ≤ 1kHz 1kHz < f ≤ 6kHz Filter(ON)	Range 1% ~ 110% of range ±(0.2% of reading+0.2% of range) ±(0.1% of reading+0.1% of range) ±(0.1% of reading+0.3% of range) ±3% of reading Add 3% of reading@45Hz~66Hz Add ±0.03% of reading/°C
TEMPERATURE EFFECT FREQUENCY	5-18°C/28-40°C	Add ±0.03% of reading/°C
ITEM MEASUREMENT	Filter(ON) Filter(OFF)	Range 30.000 Hz~499.99 Hz 30.000 Hz~9.9999 kHz Voltage, Current
PARAMETER EFFECTIVE RANGE ACCURACY		10%~105% of voltage input ±0.06% of reading
<b>INTEGRATION</b>		
ITEM INTERGRATION TIME	Accuracy Range Accuracy	Range ±(voltage or current accuracy+0.1% of reading) 0 hour 00 min ~ 9999 hour 59 min ±0.01%±1second
<b>GENERAL INFORMATION</b>		
DISPLAY STANDARD INTERFACE POWER SOURCE POWER CONSUMPTION DIMENSION & WEIGHT		4" TFT LCD RS-232C, USB device, LAN AC 100~240 V, 50-60Hz Max. 25VA 270(W) x 110(H) x 350(D) mm, Aapprox. 2.9kg

Specifications subject to change without notice. PM-8213CD1DH

## ORDERING INFORMATION

<b>GPM-8213 with GPIB</b>	Digital Power Meter (RS-232C/USB device/LAN/Opt.01 GPIB)
<b>GPM-8213</b>	Digital Power Meter (RS-232C/USB device/LAN)

## ACCESSORIES


Safety Sheet x 1, Power Cord x 1, Test Lead GTL-209 x 1  
CD x 1 (User manual/ USB driver)

## OPTION


**Opt.01** GPIB card (factory installed)

## OPTION ACCESSORIES

<b>GPM-001</b>	Test Fixture
<b>GTL-232</b>	RS-232 Cable, 9-pin Female to 9-pin, null Modem for Computer
<b>GTL-246</b>	USB Cable, A-B type, approx. 1200mm
<b>GTL-248</b>	GPIB Cable, approx. 2000mm
<b>GTL-251</b>	GPIB-USB-HS+ (high Speed)
<b>GRA-422</b>	Rack Adapter Panel (19", 2U)

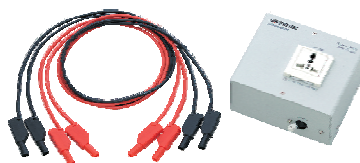

GPM-001 Test Fixture

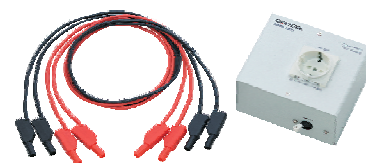

GPM-001 Test Fixture(EU)

Global Headquarters  
**GOOD WILL INSTRUMENT CO., LTD.**  
No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

China Subsidiary  
**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**  
No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277  
E-mail: marketing@instek.com.cn

Malaysia Subsidiary  
**GOOD WILL INSTRUMENT (SEA) SDN. BHD.**  
No. 1-3-18, Elit Avenue, Jalan Mayang Pasir 3,  
11950 Bayan Baru, Penang, Malaysia  
T +604-6111122 F +604-6115225  
E-mail: sales@goodwill.com.my

Europe Subsidiary  
**GOOD WILL INSTRUMENT EURO B.V.**  
De Run 5427A, 5504DC Veldhoven, THE NETHERLANDS  
T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary  
**INSTEK AMERICA CORP.**  
5198 Brooks Street Montclair, CA 91763, U.S.A.  
T +1-909-399-3535 F +1-909-399-0819  
E-mail: sales@instekamerica.com

Japan Subsidiary  
**TEXIO TECHNOLOGY CORPORATION.**  
7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin  
Yokohama, Kohoku-ku, Yokohama, Kanagawa,  
222-0033 Japan  
T +81-45-620-2305 F +81-45-534-7181  
E-mail: info@texio.co.jp

Korea Subsidiary  
**GOOD WILL INSTRUMENT KOREA CO., LTD.**  
Room No.503, Gyeonginro 775 (Mullae-Dong 3Ga,  
Ace Hightech-City B/D 1Dong), Yeongduengpo-Gu,  
Seoul 150093, Korea.  
T +82-2-3439-2205 F +82-2-3439-2207  
E-mail: gwinstek@gwinstek.co.kr

**GW INSTEK**  
Simply Reliable



www.gwinstek.com

www.facebook.com/GWInstek