

TEMPERATURE HiTESTER 3441,3442

Environmental Measuring Instruments




Supports temperature management needs of various applications



■ 3441/3442 Extended Operation, Max/Min Temperature Recording, Water-resistant Construction (3442 only)

- The **3442** has a water-resistant construction.
- Measurement in damp environments is possible by using the thermometer in combination with the **9472** or **9475** temperature probe. (-100°C to 1300°C)*
- Choose from 9 different temperature probes (optional), according to your application.

- Recording of maximum temperature and minimum temperature

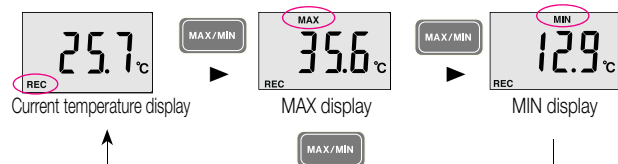

The **3441** and **3442** support temperature management by recording maximum and minimum temperatures in memory. By pressing the MAX/MIN key, you can switch to display of the current maximum and minimum temperatures at any time.

* Measurable temperature range varies according to temperature sensor type.



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091



www.hioki.com

Hioki company overview, new products, environmental considerations and other information are available on our website.



3441/3442 Specifications (accuracy at 23°C ±5°C, 80% rh or less)

Measurement sensor : Type K thermocouple
 Measurement range : -100°C to 1300°C (-148°F to 2372°F)
 Resolution : 0.1°C (100.0 to 199.9°C), 1°C (200 to 1300°C)/
 0.1°F (-148°F to 392°F), 1°F (393°F to 2372°F)
 Accuracy : ±0.1% rdg. ±0.8°C (from -100.0 to 199.9°C)/
 (Period of Guaranteed ±0.1% rdg. ±1.5°F (-148°F to 392°F)
 Accuracy:6 months) ±0.2% rdg. ±1°C (from 200 to 1300°C)/
 ±0.2% rdg. ±1.8°F (393°F to 2372°F)
 (Accuracy of temperature sensor is added.)
 Temperature coefficient : 0.03°C/C (from -100.0 to 199.9°C) / 0.054°F/F (-148°F to 392°F)
 0.05°C/C (from 200 to 1300°C) / 0.09°F/F (393°F to 2372°F)
 Sampling rate : 2 / second
 Display : LCD display
 Reference contact compensation : Automatic
 Functions : Max/Min temperature recording and display, display data hold, sensor
 discontinuity display (----), over-range display (O.F. - O.F), auto power
 save (operates after 30 min, can be disabled), low battery warning


Operating environment : Indoors, at altitude up to 2000 m
 Ambient conditions : for use: 0 to 40°C (32°F to 104°F), 80% rh or less (non-condensating)
 for storage: -10 to 50°C (14°F to 122°F), 80% rh or less (non-condensating)
 Applicable standards : Safety, EN61010, Measurement category I,
 Pollution level 2/EMC, EN61326
 Water resistance: IP54 (EN60529)
 Power supply : 4 R6P manganese dry cell batteries or 4 LR6 alkaline
 batteries (AAA)
 Maximum rated power : 35 mVA
 Continuous operating : 200 hours or more (using manganese batteries)
 time
 Dimensions/mas : Approx. 74(W) × 155(H) × 24(D) mm (2.6 × 5.9 × 0.95
 in), approx. 160g (5.6 oz) (not including batteries or probe)
 Accessories : Batteries, strap band

Choose from a wide range of temperature sensors for various applications (optional)


unit=mm (inch)

TEMPERATURE PROBE for 3441 / 3442 ●:water-resistant structure


9472 / 9473 SHEATH TYPE




9474 / 9475 SHEATH TYPE



9180 / 9183 SHEATH TYPE




9182 SHEATH TYPE



9181 SURFACE TYPE



9476 SURFACE TYPE



Item	water-resistant structure									
	9472	9473	9474	9475	9183	9180	9476	9181	9182	
Thermocouple material	K type (Chromel/Almel)									
Tolerance	The greater of ±1.5°C(2.7°F) or ±0.4% of measured temperature					The greater of ±2.5°C(4.5°F) *1				
Response (90%)*	About 5 sec	About 10 sec	About 5 sec	About 10 sec	About 5 sec		About 3 sec			
Size of Sheath	φ2.3×150mm	φ4.8×300mm	φ2.3×100mm	φ4.8×100mm	φ3.2×150 mm		φ20 mm	φ15 mm	φ3.2×500mm	
Cable	General use (-20°C to 90°C, -4°F to 194°F) 1 m (0°C~150°C) 2m									
Grip heat resistance	80°C				150°C		80°C	150°C	90°C	
Max use temperature	-100 to 300°C -148 to 572°F	0 to 800°C 32 to 1472°F	-100 to 300°C -148 to 572°F	-100 to 500°C -148 to 932°F	-50 to 750°C -58 to 1382°F		-40 to 500°C -40 to 932°F	-50 to 400°C -58 to 752°F	-50 to 750°C -58 to 1382°F	

* Sheath type: Responsiveness in ice water at 0°C (32°F) and in boiling water at 100°C(212°F)
 Surface type: Responsiveness on a metal surface at 0°C (32°F) and at 100°C(212°F)

*1 9180, 9182: The greater of ±2.5°C(4.5°F) or ±0.75% of measured temperature
 9476: (-0.03 ×T)°C to + 2.5°C at 100°C<(T-Ts)
 9181: (-0.035×T)°C to + 2.5°C at 100°C<(T-Ts)
 T: measured temperature, Ts: environmental temperature

TEMPERATURE HiTESTER 3441 (°C only)
TEMPERATURE HiTESTER 3441-02 (°C/°F selectable)
TEMPERATURE HiTESTER 3442 (°C only)

Options for 3441(-02), 3442

- SHEATH TYPE TEMPERATURE PROBE 9180 SHEATH TYPE TEMPERATURE PROBE 9472
- SHEATH TYPE TEMPERATURE PROBE 9181 SHEATH TYPE TEMPERATURE PROBE 9473
- SHEATH TYPE TEMPERATURE PROBE 9182 SHEATH TYPE TEMPERATURE PROBE 9474
- SHEATH TYPE TEMPERATURE PROBE 9183 SHEATH TYPE TEMPERATURE PROBE 9475
- SHEATH TYPE TEMPERATURE PROBE 9183 SURFACE TYPE TEMPERATURE PROBE 9476
- SHEATH TYPE TEMPERATURE PROBE 9183 CARRYING CASE 9386-01

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.



HIOKI E. E. CORPORATION

Headquarters :

81 Koizumi, Ueda, Nagano, 386-1192, Japan
 TEL +81-268-28-0562 FAX +81-268-28-0568
 http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :

TEL +1-609-409-9109 FAX +1-609-409-9108
 http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :

TEL +86-21-63910090 FAX +86-21-63910360
 http://www.hioki.cn / E-mail: info@hioki.com.cn

Beijing Office :

TEL +86-10-84418761
 FAX +86-10-84418763 / E-mail: info-bj@hioki.com.cn

Guangzhou Office :

TEL +86-20-38392673
 FAX +86-20-38392679 / E-mail: info-gz@hioki.com.cn

Shenzhen Office :

TEL +86-755-83038357
 FAX +86-755-83039160 / E-mail: info-sz@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED :

TEL +91-731-6548081 FAX +91-731-4020083
 E-mail: info@hioki.in

HIOKI SINGAPORE PTE. LTD. :

TEL +65-6634-7677 FAX +65-6634-7477
 E-mail: info@hioki.com.sg

DISTRIBUTED BY